EKI-2428G-4FA

24GE+4G SFP Port L2 Unmanaged Switch with AC Input



Features

- 24 x Gigabit copper ports + 4 x Gigabit SFP ports
- SFP socket for easy and flexible fiber expansion
- Provides 8K MAC address
- 100~240 V_{AC} power input



Introduction

The EKI-2428G is an unmanaged switch with 24 Gigabit ports and 4 Gigabit SFP ports. It is designed for rack-mount installation, and suitable for edge to core industrial networks. The wire speed across all ports up to 56 Gbps for L2 traffic forwarding.

Specifications

Communications

■ **Standard** IEEE 802.3, 802.3u, 802.3x, 802.3ab, 802.3z
■ **LAN** 10/100/1000BASE-TX, optional 100BASE-FX,

1000BASE-SX/LX/LHX/XD/ZX/EZX

• Transmission Distance Ethernet: Up to 100 m (4- wire Cat.5e, Cat.6 RJ45

cable suggested for Gigabit port) SFP: Up to 110 km (depends on SFP)

Transmission Speed Gigabit Copper: 10/100/1000 Mbps, Auto-Negotiation

Gigabit Fiber: Up to 1000 Mbps

Interface

Connectors
 24 x RJ45 (Ethernet)
 4 x SFP (mini-GBIC) ports

LED Indicators
 10/100T (X): Link/Activity, Duplex/Collision

Gigabit Copper: Link/Activity, Speed (1000 Mbps)

SFP: Link/Activity

Debug Port RS-232 (RJ45)

Mechanism

Enclosure Metal shell with solid mounting kits
 Dimensions (W x H x D) 442 x 44 x 211.1 mm (17.4" x 1.73" x 8.31")

Mounting 1U 19" Rack mount

Power

Power Consumption 18W

Power Input
 100~240V single AC power input

Protection

Power Reverse PresentOverload Current Present

Environment

Operating Temperature
 Storage Temperature
 O ~ 55°C (32 ~ 131°F)
 20 ~ 70°C (-4 ~ 158°F)
 Operating Humidity
 Storage Humidity
 To ~ 95% (non-condensing)
 O ~ 95% (non-condensing)

MTBF 620,427 hours

Certification

EMI CE FCC Class A
 EMS EN 61000-4-2
 EN 61000-4-3
 EN 61000-4-4
 EN 61000-4-5
 EN 61000-4-6
 EN 61000-4-8

 Shock IEC 60068-2-27


Shock IEC 60068-2-27
 Freefall IEC 60068-2-32
 Vibration IEC 60068-2-6



IT and Instrumentation for industry



EKI-2428G-4FA

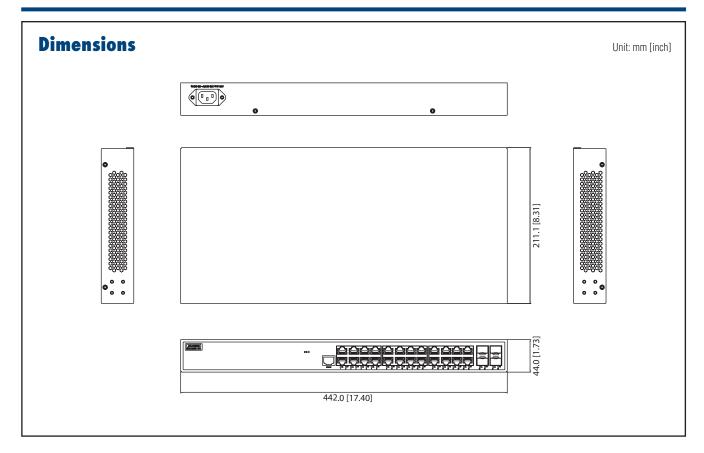

Ordering Information

■ **EKI-2428G-4FA-AE** 24GE+4G SFP Port Unmanaged Ethernet Switch

