



Ethernet I/O Modules



PhotoMOS Relay Output and DI Module

Features

- PoE and Regular Ethernet Options
- Built-In Web Server
- Web HMI
- Modbus/TCP, Modbus/UDP Protocol
- Communication Security
- Dual Watchdog
- Operating Temperature: -25 ~ +75 °C
- I/O Pair Connection
- Built-In I/O
 - DI/Counter: 6 Channels
 - PhotoMOS Relay: 6 Channels



Introduction

The ET-7000/PET-7000, a web-based Ethernet I/O module, features a built-in web server which allows configuration, I/O monitoring and I/O control by simply using a regular web browser. Remote control is as easy as surfing the Internet.

Besides, with the web HMI function, no more programming or HTML skills are required; creating dynamic and attractive web pages for I/O monitoring and I/O control would be fun to engineers ever after. The ET-7000/PET-7000 offers easy and safe access for users from anytime and anywhere! In addition, the ET-7000/PET-7000 also supports Modbus/TCP protocol that makes perfect integration to SCADA software.

Furthermore, PET-7000 features "PoE" that not only data but also power is carried through an Ethernet cable. This feature makes installation of PET-7000 a piece of cake. Imagine that no more unnecessary wires, only an Ethernet cable takes care of everything in the field.

Applications

Building Automation, Factory Automation, Machine Automation, Remote Maintenance, Remote diagnosis, Testing Equipment.


System Specifications

Models	ET-7065	PET-7065
Software		
Built-In Web Server	Yes	
Web HMI	Yes	
I/O Pair Connection	Yes	
Communication		
Ethernet Port	10/100 Base-TX with Auto MDI/MDI-X	
Protocol	Modbus/TCP, Modbus/UDP	
Security	ID, Password and IP Filter	
Dual Watchdog	Yes, Module (0.8 second), Communication (Programmable)	
LED Indicators		
L1 (System Running)	Yes	
L2 (Ethernet Link/Act)	Yes	
L3 (Ethernet 10/100 M Speed)	Yes	
PoE Power	-	Yes
2 Way Isolation		
Ethernet	1500 Vdc	-
I/O	3000 Vrms	3000 Vrms
EMS Protection		
ESD (IEC 61000-4-2)	4 kV Contact for each terminal	
EFT (IEC 61000-4-4)	+/-2 kV for Power	
Power Requirements		
Reverse Polarity Protection	Yes	
Powered from terminal block	Yes, 10 ~ 30 Vdc	Yes, 12 ~ 48 Vdc
Powered from PoE	-	Yes, IEEE 802.3af, Class1
Consumption	2.9 W	4.8 W
Mechanical		
Dimensions (W x L x D)	72 mm x 123 mm x 35 mm	
Installation	DIN-Rail or Wall mounting	
Environment		
Operating Temperature	-25 °C ~ +75 °C	
Storage Temperature	-30 °C ~ +80 °C	
Humidity	10 ~ 90% RH, non-condensing	

I/O Specifications

Digital Input/Counter	
Input Channels	6
Type	Wet Contact (Sink, Source)
On Voltage Level	+10 V _{DC} ~ +50 V _{DC}
Off Voltage Level	+4 V _{DC} max.
Input Impedance	10 kΩ
Counters	Max. Count
	4,294,967,285 (32 bits)
	Max. Input Frequency
500 Hz	
Min. Pulse Width	1 ms
Overvoltage Protection	+70 V _{DC}
PhotoMOS Relay	
Output Channels	6
Type	PhotoMOS Relay, Form A
Load Voltage	60 V _{DC} /V _{AC}
Max. Load Current	60V/1.0A (Operating Temperature -25 °C ~ +40 °C)
	60V/0.8A (Operating Temperature +40 °C ~ +60 °C)
	60V/0.7A (Operating Temperature +60 °C ~ +75 °C)
Operate Time	1.3 ms (Typical)
Release Time	0.1 ms (Typical)
Power On Value	Yes, Programmable
Safe Value	Yes, Programmable

Pin Assignment

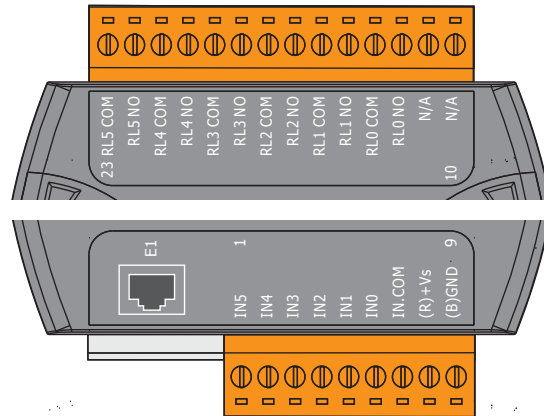

Wire Connection

Digital Input/Counter	Readback as 1	Readback as 0
Sink	+10 ~ +50 V _{DC}	OPEN or <4 V _{DC}
Source	+10 ~ +50 V _{DC}	OPEN or <4 V _{DC}
PhotoMOS Relay	ON State	OFF State
Form A Relay Contact	Readback as 1	Readback as 0

Ordering Information

ET-7065 CR	6-channel PhotoMOS Relay Output and 6-channel Isolated Digital Input Module with 32-bit Counters (RoHS)
PET-7065 CR	6-channel PhotoMOS Relay Output and 6-channel Isolated Digital Input Module with 32-bit Counters PoE Module (RoHS)

Accessories

NS-205 CR	Unmanaged 5-port Industrial Ethernet Switch; requires 24 V _{DC} Input (RoHS)
NS-205PSE CR	Unmanaged Ethernet switch with 4-PoE and 1 RJ45 uplink; requires 48 V _{DC} Input (RoHS)
NS-205PSE-24V CR	Unmanaged Ethernet switch with 4-PoE and 1 RJ45 uplink; requires 24 V _{DC} Input (RoHS)
MDR-20-24 CR	24V/1A, 24 W Power Supply with DIN-Rail Mounting (RoHS)
DIN-KA52F-48 CR	48V/0.52A, 25 W Power Supply with DIN-Rail Mounting (RoHS)