

KwikDraw-A 17HD-12






Features

Key features:-

- 1U 17" widescreen LCD console drawer with DVI-D
- Support Full HD with 1080p resolution
- 104-key keyboard with touchpad or trackball
- New enhanced aesthetics with moulded front handle
- Front USB port for device access (USB hub KVM)
- 2 post rack mounting available
- 12-port DVI-D, USB & Audio KVM

Dimensions

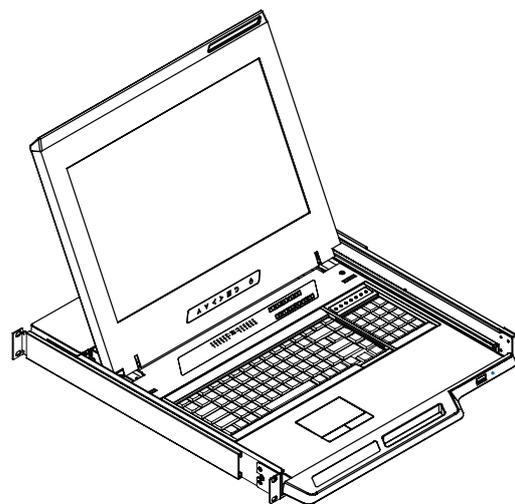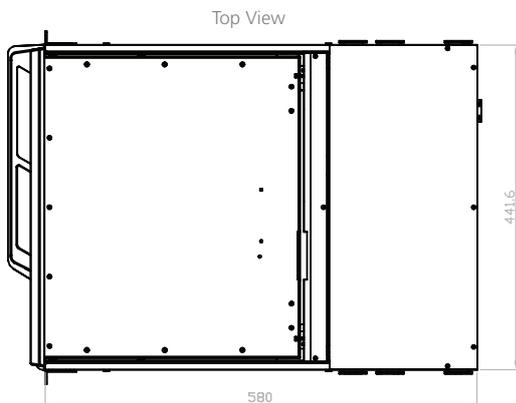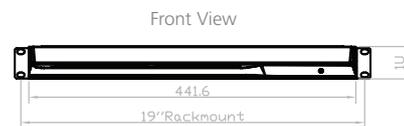

Unit : mm

Sales: +44 (0) 1273 570 220 Admin: +44 (0) 1273 608 331 Fax: +44 (0) 1273 570 215 Website: www.amplicon.com Email: sales@amplicon.com

KwikDraw-A 17HD-12

Specifications

The information is believed to be accurate. However Amplicon Liveline Limited accepts no responsibility for any problems caused by errors and omissions. Specifications are subject to change without notice.

Console


LCD Panel	Size (diagonal): 17.3" widescreen TFT Max resolution: 1920 x 1080 Brightness (cd/m ²): 400 Backlight: LED Colours: 16.7 M, 8-bit Contrast ratio (typ): 600 : 1 Viewing angle (H/V): 160° x 140° Active area (mm): 382 x 215 MTBF (hrs): 50,000 Signal input: VGA or DVI-D	Regulatory	Safety: FCC & CE certified Environmental: RoHS2 & REACH compliant
Casing Colour	Black (RAL 9005)	Power	Input: Auto-sensing 100 to 240VAC, 50 / 60Hz Consumption: Max. 48 Watt, Standby 5 Watt
Weight	Net: 11.6kgs (25.5lbs) Gross: 17.5kgs (38.5lbs)	Environmental	Operating: 0 to 50°C Storage: -5 to 60°C Relative humidity: 5-90%, non-condensing Shock: 10G acceleration (11ms duration) Vibration: 5-500Hz 1G RMS random vibration
Dimensions (W x D x H)	Product: 441.6 x 580 x 44 mm (17.4 x 22.8 x 1.73 in) Packing: 590 x 808 x 140 mm (23.2 x 31.8 x 5.5 in)		

KVM

KVM Port	Number of ports: 12 Connector: DVI-D connector, USB 3.0 connector (combined for keyboard, mouse & audio) Connectivity: Combo 4-in-1 KVM cable, 6 or 15 feet	Regulatory	Safety: FCC & CE certified Environmental: RoHS2 & REACH compliant
Local Console	Graphic connector: 1 x DVI-D Input device: 2 x USB type A for keyboard & mouse Audio out: 1 x 3.5mm stereo audio	Power	Input: Auto-sensing 100 to 240VAC, 50 / 60Hz Consumption: Max. 12 Watt, Standby 5 Watt
Casing Colour	Black (RAL 9005)	Environmental	Operating: 0 to 50°C Storage: -5 to 60°C Relative humidity: 90%, non-condensing Shock: 50G peak acceleration (11ms, half-sine wave) Vibration: 58-100Hz / 0.98G (11ms / cycle)
Weight	Net: 2.5kgs (5.5lbs) Gross: 5.4kgs (11.9lbs)	Management	PC selection: Front button & hotkey
Dimensions (W x D x H)	Product: 443 x 171 x 44 mm (17.4 x 6.7 x 1.73 in) Packing: 500 x 400 x 90 mm (19.7 x 15.7 x 3.5 in)	Compatibility	Multi-platform: Mix PCs, SUN and Mac G3 / G4 Mac / iMac Support: Windows 7 / Vista / 2003 / XP, Linux, Unix

Rear ports

KVM Port Connection

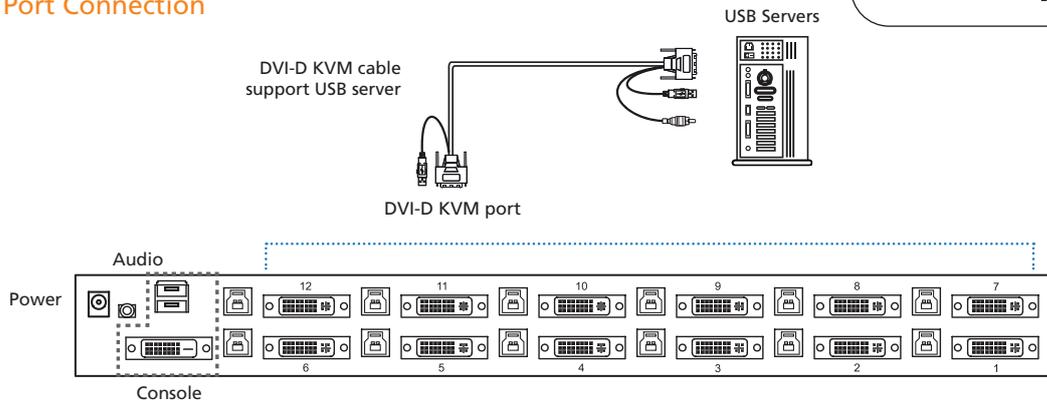

Sales: +44 (0) 1273 570 220 Admin: +44 (0) 1273 608 331 Fax: +44 (0) 1273 570 215 Website: www.amplicon.com Email: sales@amplicon.com