

SPECIFICATIONS

NI cDAQ™ -9184

4-Slot, Ethernet CompactDAQ Chassis

Definitions

Warranted specifications describe the performance of a model under stated operating conditions and are covered by the model warranty.

Characteristics describe values that are relevant to the use of the model under stated operating conditions but are not covered by the model warranty.

- *Typical* specifications describe the expected performance met by a majority of the models.
- *Nominal* specifications describe parameters and attributes that may be useful in operation.

Specifications are *Typical* unless otherwise noted.

Conditions

Specifications are valid at 25 °C unless otherwise noted.

Analog Input

| | |
|----------------------------------|--|
| Input FIFO size | 127 samples per slot |
| Maximum sample rate ¹ | Determined by the C Series module or modules |
| Timing accuracy ² | 50 ppm of sample rate |
| Timing resolution ² | 12.5 ns |
| Number of channels supported | Determined by the C Series module or modules |

¹ Performance dependent on type of installed C Series module and number of channels in the task.

² Does not include group delay. For more information, refer to the documentation for each C Series module.

Analog Output

| | |
|--|--|
| Number of channels supported | |
| Hardware-timed task | |
| Onboard regeneration | 16 |
| Non-regeneration | Determined by the C Series module or modules |
| Non-hardware-timed task | |
| Determined by the C Series module or modules | |
| Maximum update rate | |
| Onboard regeneration | 1.6 MS/s (multi-channel, aggregate) |
| Non-regeneration | Determined by the C Series module or modules |
| Timing accuracy | 50 ppm of sample rate |
| Timing resolution | 12.5 ns |
| Output FIFO size | |
| Onboard regeneration | 8,191 samples shared among channels used |
| Non-regeneration | 127 samples per slot |
| AO waveform modes | Non-periodic waveform, periodic waveform regeneration mode from onboard memory, periodic waveform regeneration from host buffer including dynamic update |

Digital Waveform Characteristics

| | |
|--------------------------------------|------------------------|
| Waveform acquisition (DI) FIFO | |
| Parallel modules | 511 samples per slot |
| Serial modules | 63 samples per slot |
| Waveform generation (DO) FIFO | |
| Parallel modules | 2,047 samples per slot |
| Serial modules | 63 samples per slot |
| Digital input sample clock frequency | |
| Streaming to application memory | System-dependent |
| Finite | 0 MHz to 10 MHz |

Digital output sample clock frequency

| | |
|-----------------------------------|------------------|
| Streaming from application memory | System-dependent |
| Regeneration from FIFO | 0 MHz to 10 MHz |
| Finite | 0 MHz to 10 MHz |
| Timing accuracy | 50 ppm |

General-Purpose Counters/Timers

| | |
|-------------------------------|---|
| Number of counters/timers | 4 |
| Resolution | 32 bits |
| Counter measurements | Edge counting, pulse, semi-period, period, two-edge separation, pulse width |
| Position measurements | X1, X2, X4 quadrature encoding with Channel Z reloading; two-pulse encoding |
| Output applications | Pulse, pulse train with dynamic updates, frequency division, equivalent time sampling |
| Internal base clocks | 80 MHz, 20 MHz, 100 kHz |
| External base clock frequency | 0 MHz to 20 MHz |
| Base clock accuracy | 50 ppm |
| Output frequency | 0 MHz to 20 MHz |
| Inputs | Gate, Source, HW_Arm, Aux, A, B, Z, Up_Down |
| Routing options for inputs | Any module PFI, analog trigger, many internal signals |
| FIFO | Dedicated 127-sample FIFO |

Frequency Generator

| | |
|---------------------|-------------------------|
| Number of channels | 1 |
| Base clocks | 20 MHz, 10 MHz, 100 kHz |
| Divisors | 1 to 16 (integers) |
| Base clock accuracy | 50 ppm |
| Output | Any module PFI terminal |

Module PFI Characteristics

| | |
|------------------------------------|---|
| Functionality | Static digital input, static digital output, timing input, and timing output |
| Timing output sources ³ | Many analog input, analog output, counter, digital input, and digital output timing signals |
| Timing input frequency | 0 MHz to 20 MHz |
| Timing output frequency | 0 MHz to 20 MHz |

Digital Triggers

| | |
|------------------------|--|
| Source | Any module PFI terminal |
| Polarity | Software-selectable for most signals |
| Analog input function | Start Trigger, Reference Trigger, Pause Trigger, Sample Clock, Sample Clock Timebase |
| Analog output function | Start Trigger, Pause Trigger, Sample Clock, Sample Clock Timebase |
| Counter/timer function | Gate, Source, HW_Arm, Aux, A, B, Z, Up_Down |

Module I/O States

| | |
|-------------|--|
| At power-on | Module-dependent. Refer to the documentation for each C Series module. |
|-------------|--|

Network Interface

| | |
|--------------------------|---|
| Network protocols | TCP/IP, UDP |
| Network ports used | HTTP:80 (configuration only), TCP:3580; UDP:5353 (configuration only), TCP:5353 (configuration only); TCP:31415; UDP:7865 (configuration only), UDP:8473 (configuration only) |
| Network IP configuration | DHCP + Link-Local, DHCP, Static, Link-Local |

³ Actual available signals are dependent on type of installed C Series module.

| | |
|-------------------------------|---|
| High-performance data streams | 7 |
| Data stream types available | Analog input, analog output, digital input, digital output, counter/timer input, counter/timer output, NI-XNET ⁴ |
| Default MTU size | 1500 bytes |
| Jumbo frame support | Up to 9000 bytes |

Ethernet

| | |
|--------------------------|--|
| Network interface | 1000 Base-TX, full-duplex; 1000 Base-TX, half-duplex; 100 Base-TX, full-duplex; 100 Base-TX, half-duplex; 10 Base-T, full-duplex; 10 Base-T, half-duplex |
| Communication rates | 10/100/1000 Mbps, auto-negotiated |
| Maximum cabling distance | 100 m/segment |

Power Requirements



Caution The protection provided by the NI cDAQ-9184 chassis can be impaired if it is used in a manner not described in the *NI cDAQ-9181/9184/9188/9191 User Manual*.



Note Some C Series modules have additional power requirements. For more information about C Series module power requirements, refer to the documentation for each C Series module.



Note Sleep mode for C Series modules is not supported in the NI cDAQ-9184.

| | |
|--|-------------|
| Voltage input range | 9 V to 30 V |
| Maximum power consumption ⁵ | 15 W |

⁴ When a session is active, CAN or LIN (NI-XNET) C Series modules use a total of two data streams regardless of the number of NI-XNET modules in the chassis.

⁵ Includes maximum 1 W module load per slot across rated temperature and product variations.



Note The maximum power consumption specification is based on a fully populated system running a high-stress application at elevated ambient temperature and with all C Series modules consuming the maximum allowed power.


| | |
|------------------------------|---|
| Power input connector | 2 positions 3.5 mm pitch mini-combicon screw terminal with screw flanges, Sauro CTMH020F8-0N001 |
| Power input mating connector | Sauro CTF020V8, Phoenix Contact 1714977, or equivalent |

Physical Characteristics

| | |
|----------------------------|--|
| Weight (unloaded) | Approximately 643 g (22.7 oz) |
| Dimensions (unloaded) | 178.1 mm × 88.1 mm × 64.3 mm (7.01 in. × 3.47 in. × 2.53 in.) Refer to the following figure. |
| Screw-terminal wiring | |
| Gauge | 0.5 mm ² to 2.1 mm ² (20 AWG to 14 AWG) copper conductor wire |
| Wire strip length | 6 mm (0.24 in.) of insulation stripped from the end |
| Temperature rating | 85 °C |
| Torque for screw terminals | 0.20 N · m to 0.25 N · m (1.8 lb · in. to 2.2 lb · in.) |
| Wires per screw terminal | One wire per screw terminal |
| Connector securement | |
| Securement type | Screw flanges provided |
| Torque for screw flanges | 0.20 N · m to 0.25 N · m (1.8 lb · in. to 2.2 lb · in.) |

If you need to clean the chassis, wipe it with a dry towel.

Figure 1. NI cDAQ-9184 Dimensions

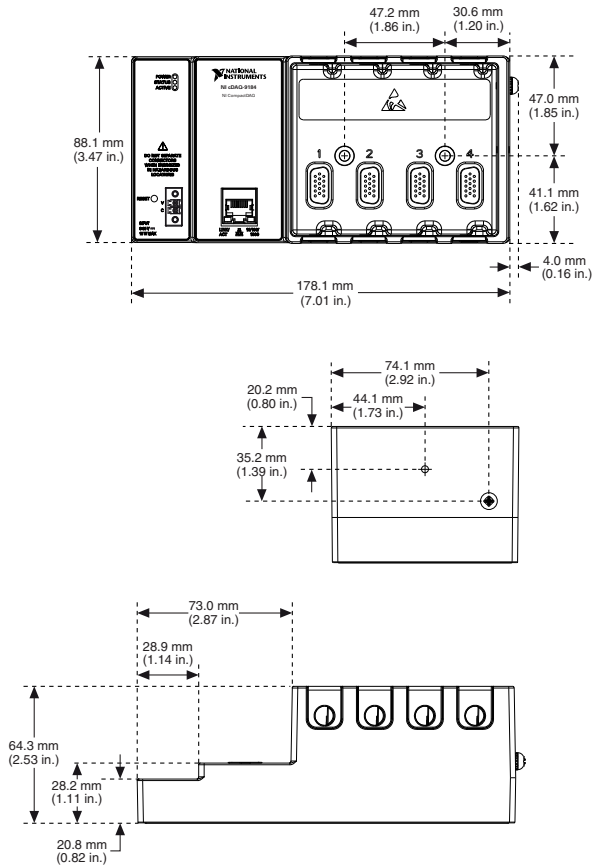

Safety Voltages

Connect only voltages that are within these limits.

V terminal to C terminal 30 V maximum, Measurement Category I

Measurement Category I is for measurements performed on circuits not directly connected to the electrical distribution system referred to as MAINS voltage. MAINS is a hazardous live

electrical supply system that powers equipment. This category is for measurements of voltages from specially protected secondary circuits. Such voltage measurements include signal levels, special equipment, limited-energy parts of equipment, circuits powered by regulated low-voltage sources, and electronics.



Caution Do not connect the system to signals or use for measurements within Measurement Categories II, III, or IV.



Note Measurement Categories CAT I and CAT O (Other) are equivalent. These test and measurement circuits are not intended for direct connection to the MAINS building installations of Measurement Categories CAT II, CAT III, or CAT IV.

Environmental

| | |
|---|------------------------------|
| Operating temperature (IEC 60068-2-1 and IEC 60068-2-2) | -20 °C to 55 °C ⁶ |
|---|------------------------------|



Caution To maintain product performance and accuracy specifications when the ambient temperature is between 45 and 55 °C, you must mount the chassis horizontally to a metal panel or surface using the screw holes or the panel mount kit. Measure the ambient temperature at each side of the CompactDAQ system 63.5 mm (2.5 in.) from the side and 25.4 mm (1.0 in.) from the rear cover of the system. For further information about mounting configurations, go to ni.com/info and enter the Info Code `cdaqmounting`.

| | |
|---|-----------------|
| Storage temperature (IEC 60068-2-1 and IEC 60068-2-2) | -40 °C to 85 °C |
|---|-----------------|

| | |
|--------------------|-------|
| Ingress protection | IP 30 |
|--------------------|-------|

| | |
|-------------------------------------|------------------------------|
| Operating humidity (IEC 60068-2-56) | 10% to 90% RH, noncondensing |
|-------------------------------------|------------------------------|

| | |
|-----------------------------------|-----------------------------|
| Storage humidity (IEC 60068-2-56) | 5% to 95% RH, noncondensing |
|-----------------------------------|-----------------------------|

| | |
|------------------------------|---|
| Pollution Degree (IEC 60664) | 2 |
|------------------------------|---|

| | |
|------------------|---------|
| Maximum altitude | 5,000 m |
|------------------|---------|

Indoor use only.

⁶ When operating the NI cDAQ-9184 in temperatures below 0 °C, you must use the PS-15 power supply or another power supply rated for below 0 °C.

Hazardous Locations

| | |
|---|---|
| U.S. (UL) | Class I, Division 2, Groups A, B, C, D, T4; Class I, Zone 2, AEx nA IIC T4 |
| Canada (C-UL) | Class I, Division 2, Groups A, B, C, D, T4; Class I, Zone 2, Ex nA IIC T4 |
| Europe (ATEX) and International (IECEX) | Ex nA IIC T4 Gc |

Shock and Vibration

To meet these specifications, you must direct mount the NI cDAQ-9184 system and affix ferrules to the ends of the terminal lines.

| | |
|-------------------|---|
| Operational shock | 30 g peak, half-sine, 11 ms pulse (Tested in accordance with IEC 60068-2-27. Test profile developed in accordance with MIL-PRF-28800F.) |
| Random vibration | |
| Operating | 5 Hz to 500 Hz, 0.3 g_{rms} |
| Non-operating | 5 Hz to 500 Hz, 2.4 g_{rms} (Tested in accordance with IEC 60068-2-64. Non-operating test profile exceeds the requirements of MIL PRF-28800F, Class 3.) |

Safety and Hazardous Locations Standards

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA C22.2 No. 61010-1
- EN 60079-0:2012, EN 60079-15:2010
- IEC 60079-0: Ed 6, IEC 60079-15; Ed 4
- UL 60079-0; Ed 6, UL 60079-15; Ed 4
- CSA 60079-0:2011, CSA 60079-15:2012



Note For UL and other safety certifications, refer to the product label or the [Online Product Certification](#) section.

Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- EN 55022 (CISPR 22): Class A emissions
- EN 55024 (CISPR 24): Immunity
- AS/NZS CISPR 11: Group 1, Class A emissions
- AS/NZS CISPR 22: Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions



Note In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia and New Zealand (per CISPR 11) Class A equipment is intended for use only in heavy-industrial locations.



Note Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.



Note For EMC declarations and certifications, and additional information, refer to the [Online Product Certification](#) section.

CE Compliance

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)
- 2014/34/EU; Potentially Explosive Atmospheres (ATEX)

Online Product Certification

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for this product, visit ni.com/certification, search by model number or product line, and click the appropriate link in the Certification column.

Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the *Minimize Our Environmental Impact* web page at ni.com/environment. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

Waste Electrical and Electronic Equipment (WEEE)



EU Customers At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit ni.com/environment/weee.

电子信息产品污染控制管理办法（中国 RoHS）



中国客户 National Instruments 符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于 National Instruments 中国 RoHS 合规性信息，请登录 ni.com/environment/rohs_china。(For information about China RoHS compliance, go to ni.com/environment/rohs_china.)

Information is subject to change without notice. Refer to the *NI Trademarks and Logo Guidelines* at ni.com/trademarks for information on NI trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering NI products/technology, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patent Notice* at ni.com/patents. You can find information about end-user license agreements (EULAs) and third-party legal notices in the `readme` file for your NI product. Refer to the *Export Compliance Information* at ni.com/legal/export-compliance for the NI global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. NI MAKES NO EXPRESS OR IMPLIED WARRANTIES AS TO THE ACCURACY OF THE INFORMATION CONTAINED HEREIN AND SHALL NOT BE LIABLE FOR ANY ERRORS. U.S. Government Customers: The data contained in this manual was developed at private expense and is subject to the applicable limited rights and restricted data rights as set forth in FAR 52.227-14, DFAR 252.227-7014, and DFAR 252.227-7015.

© 2013—2017 National Instruments. All rights reserved.

372087C-01 March 17, 2017