




# EtherCAT Series Products

## Isolated 16-ch DI EtherCAT Slave I/O Module



ECAT-2053

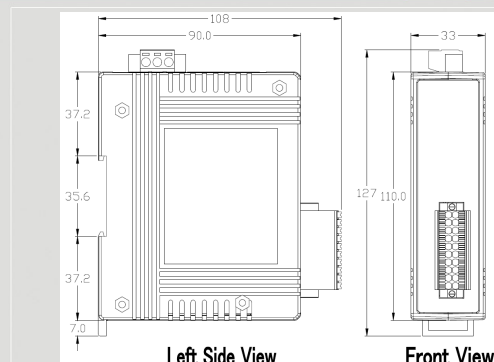

Dimensions


The ECAT-2053 is an industrial slave I/O module built in 16 digital inputs. It is equipped with the EtherCAT\* protocol and installed by daisy chain connection that provides a more scalable system with fewer wires. Users can obtain the input and output status not only via the process data but also from its LED indicators. The ECAT-2053 has passed and verified by the conformance test tool, therefore eligible EtherCAT Master or configurator can manipulate it simply and implement your various applications easily.

\* EtherCAT® is registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.

### Features

- On the fly processing: EtherCAT
- Powerful MCU handles efficient network traffic
- 2 x RJ-45 bus interface
- Distance between stations up to 100 m (100BASE-TX)
- Support daisy chain connection
- EtherCAT conformance test tool verified
- Removable terminal block connector
- LED indicators for the I/O status
- Built-In Inputs and Outputs: 8 DI and 8 DO
- RoHS compliant
- ESD Protection 4 KV Contact for each channel


### Pin Assignment



### Wire connection

Relay Contact (Wet)	+	DI.COM	+	DI.COM
Relay Close	-	DIx	Relay Open	DIx
NPN Output (Wet)	ON	DI.COM	OFF	DI.COM
		DIx		DIx

### Application

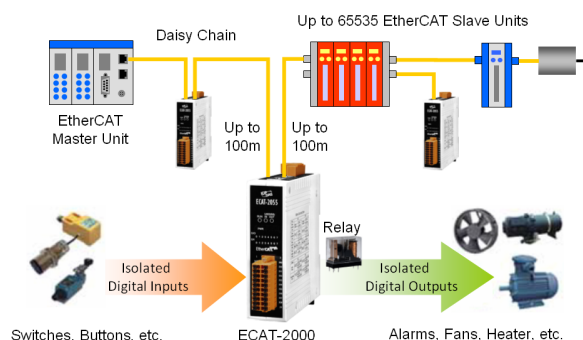



### Hardware Specifications

Digital Input	
Channels	16
Input Type	Wet (Sink/Source)
OFF Voltage Level	+2 V Max.
ON Voltage Level	+3.5 V ~ +50 V
Photo-Isolation	3750 VDC
Communication Interface	
Connector	2 x RJ-45
Protocol	EtherCAT
Distance between Stations	Max. 100 m (100BASE-TX)
Data Transfer Medium	Ethernet/EtherCAT Cable (Min. CAT 5), Shielded
Power	
Input Voltage Range	10V ~ 30VDC
Power Consumption	Max. 4W
Mechanism	
Installation	DIN-Rail
Dimensions	110mm x 90mm x 33mm (H x W x D, without connectors)
Case Material	UL 94V-0 Housing
Environment	
Operating Temperature	-25°C ~ 75°C
Storage Temperature	-30°C ~ 80°C
Relative Humidity	10 ~ 90%, No Condensation
ESD (IEC 61000-4-2)	4 KV Contact for Each Channel
EFT (IEC 61000-4-4)	Signal: 1 KV Class A; Power: 1 KV Class A
Surge (IEC 61000-4-5)	1 KV Class A

### Ordering Information

<b>ECAT-2053 CR</b>	EtherCAT Slave I/O Module with Isolated 16-ch DI (RoHS)
---------------------	---