

ED3538T/ED3538R

Hardened 10/100BASE-TX PoL/PoE Ethernet Extender Kit



Value

- › Power over Ethernet up to 1.2 kilometers over pair copper wire
- › Ethernet extension solution with high transmission data rate up to 100Mbps
- › Ethernet extension up to 2.2 kilometers

PoL (Power over Link)

Advanced Single Cable Solution for Power and Data



Features

- › Complies with IEC61000-6-2 EMC Generic standard immunity for Industrial environment
- › Ethernet Port: 10/100Mbps-Full/Half-duplex, Auto-Negotiation, Auto-MDI/MDIX
- › 100Mbps communications link over existing copper telephone wire
- › Operates transparent to higher layer protocols
- › Six speeds with speed indicator LEDs on front panel of unit, Up to 100Mbps @ about 300meters (984 ft.); 1Mbps @ about 2,200meters (7,218 ft.)
- › ED3538R supports IEEE802.3at PSE standard for PoE/PD applications
- › Supports Power Over Link application up to 1,200 meters (3,937 ft.) for Max. 5 watts power consumed PoE powered devices
- › Auto data rate negotiation for Ethernet extension interface
- › Redundant power inputs with Terminal Block and DC Jack
- › -40°C to 75°C (-40°F to 167°F) operating temperature range and tested at -40°C to 85°C (-40°F to 185°F)
- › Hardened aluminum case
- › Supports DIN-Rail, Panel and Rack mount installation

Ordering Information

| | |
|---------|--|
| ED3538T | Hardened 10/100BASE-TX Ethernet Extender with PoL Transceiver |
| ED3538R | Hardened 10/100BASE-TX PoE Ethernet Extender with PoL Receiver |


Power Supply : (Optional)

*Option - The Terminal Block type external power supplies are not included. Please order the following part numbers:

DR-120-48, SDR-120-48, SDR-240-48, SDR-480-48

Diagrams

Unit: mm

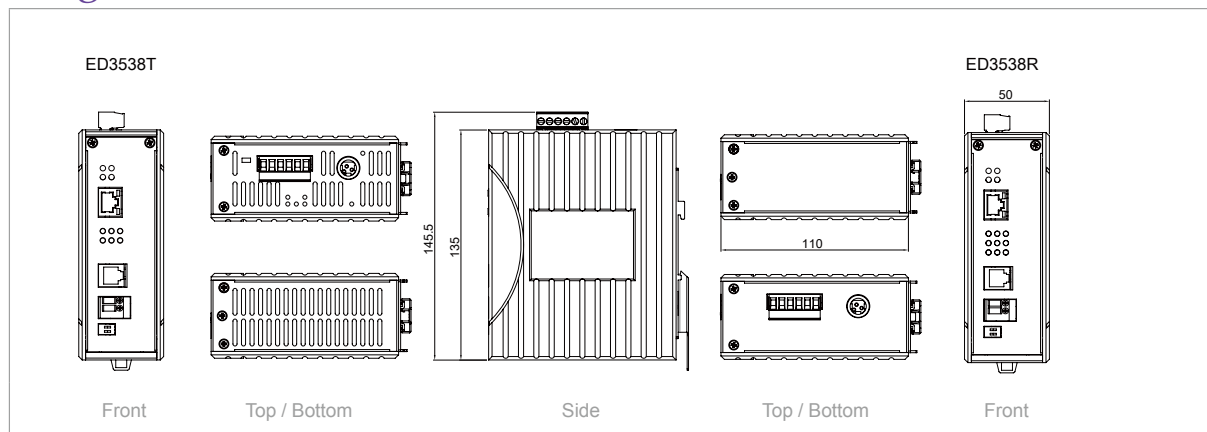

Specifications

| Technology | | | |
|--|---|-----------|--------------------|
| Standards | • IEEE802.3 10BASE-T, IEEE802.3u 100BASE-TX, IEEE802.3x, IEEE802.3af, IEEE802.3at PoE/PSE | | |
| Protocols | • Transparent to higher layer protocols | | |
| Processing Type | • IEEE802.3x Full-duplex flow control | | |
| | | | |
| Power | | | |
| Input | • Terminal Block: 46 - 57VDC • DC JACK: 48VDC • 2.5A @ 48VDC (Peak current 3.26A) | | |
| Power Consumption | Max. 65W with Power over Link (PoL) function enabled ED3538T: Max. 5W (without PoL / PoE) ED3538R: Max. 5W (without PoL / PoE) Max. 35W (with PoE only) | | |
| • Supports overload current protection | | | |
| • Supports reverse polarity protection | | | |
| | | | |
| Mechanical | | | |
| Casing | • Aluminum case • IP30 | | |
| Dimensions | • 50mm (W) x 110mm (D) x 135mm (H) (1.97" (W) x 4.33" (D) x 5.31" (H)) | | |
| Weight | • 0.8Kg (1.76lbs.) | | |
| Installation | • DIN-Rail (Top hat type 35mm), Panel, Rack Mounting | | |
| Interface | | | |
| Ethernet Port | • ED3538T/R: 1x RJ-45 port,10/100BASE-TX Full-duplex, ED3538R: 1x PoE/PSE port • Auto-Negotiation, Auto-MDI/MDIX • Speed: 10/100Mbps • Distance: 100meters (328ft.) • Cable: 100BASE-TX: UTP CAT. 5 (4-pair wire) | | |
| Ethernet Extender Port | • Port: One RJ-11 and one 2-pin Terminal Block • Distance: | | |
| Power over Link (PoL) Enable | | | |
| Distance | | Data Rate | ED3538R PoE Output |
| 300M | | 100Mbps | 30.0W |
| 400M | | 90Mbps | 15.4W |
| 600M | | 60Mbps | 14.0W |
| 800M | | 45Mbps | 9.5W |
| 1000M | | 35Mbps | 7.0W |
| 1200M | | 20Mbps | 5.0W |
| Power over Link (PoL) Disable (Power Supply Applies on ED3538R) | | | |
| Distance | | Data Rate | ED3538R PoE Output |
| 1400M | | 15Mbps | 30.0W |
| 1600M | | 10Mbps | 30.0W |
| 1800M | | 3Mbps | 30.0W |
| UP to 2200M | | 1Mbps | 30.0W |
| NOTE: Reference Performance on 24 AWG copper wire (0.5mm diameter, 1-pair wire, Cable impedance: 100ohm) | | | |
| DIP switch | • ED3538T: PoL: ON/OFF, Type: Per/Std ED3538R: Mode: Loc/Rmt, Type: Per/Std | | |
| LED Indicators | • Per Unit: Power Status (Power) • Per Port: 10/100TX: Link/Activity, Full-duplex • Line Speed: Six indicators for 100/80/60/40/20Mbps and Link below 20Mbps • PoE: Power over Ethernet function availability | | |

| Environment | |
|-------------------------------|--|
| Operating Temperature | <ul style="list-style-type: none"> -40°C to 75°C (-40°F to 167°F) Tested @ -40°C to 85°C (-40°F to 185°F) |
| Storage Temperature | <ul style="list-style-type: none"> -40°C to 85°C (-40°F to 185°F) |
| Ambient Relative Humidity | <ul style="list-style-type: none"> 5% to 95% (non-condensing) |
| Regulatory Approvals | |
| ISO | <ul style="list-style-type: none"> Manufactured in an ISO9001 facility |
| Safety | <ul style="list-style-type: none"> UL60950-1, IEC60950-1 |
| EMI | <ul style="list-style-type: none"> FCC Part 15, Class A EN61000-6-4 <ul style="list-style-type: none"> EN55022 EN61000-3-2 EN61000-3-3 |
| EMS | <ul style="list-style-type: none"> EN61000-6-2 <ul style="list-style-type: none"> EN61000-4-2 (ESD Standards) <ul style="list-style-type: none"> Contact: + / - 4KV Air: + / - 8KV EN61000-4-3 (Radiated RFI Standards) <ul style="list-style-type: none"> 10V/m, 80 to 1000MHz; 80% AM EN61000-4-4 (Burst Standards) <ul style="list-style-type: none"> Signal Ports: + / - 4KV D.C. Power Ports: + / - 4KV EN61000-4-5 (Surge Standards) <ul style="list-style-type: none"> Signal Ports: + / - 2KV; Line-to-Line D.C. Power Ports: + / - 0.5KV; Line-to-earth EN61000-4-6 (Induced RFI Standards) <ul style="list-style-type: none"> Signal Ports: 10Vrms @ 0.15 - 80MHz; 80% AM D.C. Power Ports: 10Vrms @ 0.15 - 80MHz; 80% AM EN61000-4-8 (Magnetic Field Standards) <ul style="list-style-type: none"> 30A/m @ 50, 60Hz |
| Environmental Test Compliance | <ul style="list-style-type: none"> IEC60068-2-6 Fc (Vibration Resistance) <ul style="list-style-type: none"> 5g @ 10 - 150Hz, Amplitude 0.35mm (Operation/Storage/Transport) IEC60068-2-27 Ea (Shock) <ul style="list-style-type: none"> 25g @ 11ms (Half-Sine Shock Pulse; Operation) 50g @ 11ms (Half-Sine Shock Pulse; Storage/Transport) IEC60068-2-32 Ed (Free Fall) <ul style="list-style-type: none"> 1M (3.281ft.) |