
## KwikDraw-A 17HD



Sales: +44 (0) 1273 570 220 Admin: +44 (0) 1273 608 331 Fax: +44 (0) 1273 570 215 Website: www.amplicon.com Email: sales@amplicon.com

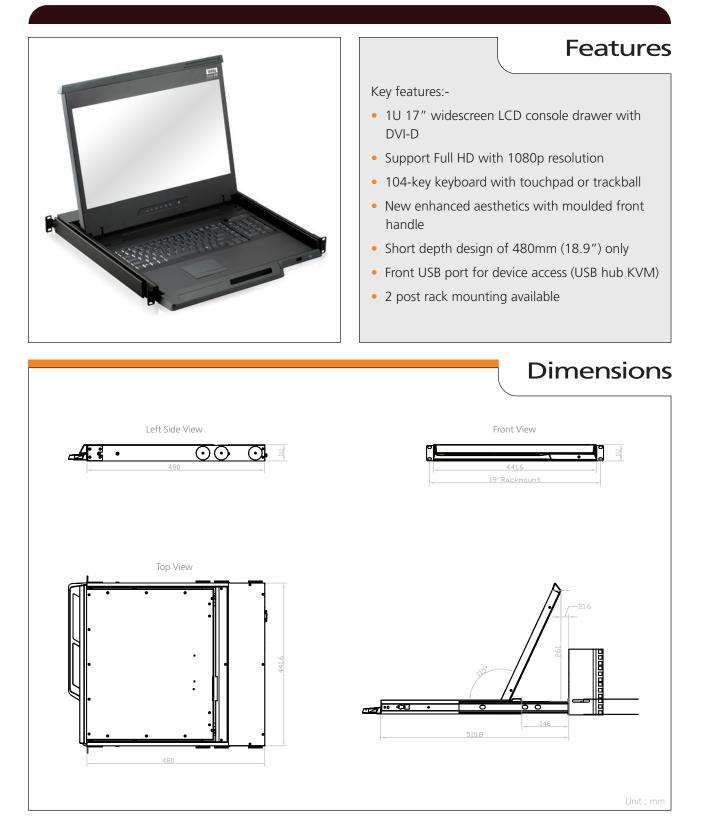

## KwikDraw-A 17HD

The information is believed to be accurate. However Amplicon Liveline Limited accepts no responsibility for any problems caused by errors and omissions. Specifications are subject to change without notice.

## **Specifications**

| LCD Panel                 | Size (diagonal): 17.3" widescreen TFT<br>Max resolution: 1920 x 1080<br>Brightness (cd/m²): 400<br>Backlight: LED<br>Colours: 16.7 M, 8-bit<br>Contrast ratio (typ): 600 : 1<br>Viewing angle (H/V): 160° x 140°<br>Active area (mm): 382 x 215<br>MTBF (hrs): 50,000<br>Signal input: VGA or DVI-D | Regulatory | Safety: FCC & CE certified<br>Environmental: RoHS2 & REACH compliant                                                                                                             |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                           |                                                                                                                                                                                                                                                                                                     | Power      | Input: Auto-sensing 100 to 240VAC, 50 / 60Hz<br>Consumption: Max. 48 Watt, Standby 5 Watt                                                                                        |
|                           |                                                                                                                                                                                                                                                                                                     |            | Operating: 0 to 50°C<br>Storage: -5 to 60°C<br>Relative humidity: 5-90%, non-condensing<br>Shock: 10G acceleration (11ms duration)<br>Vibration: 5-500Hz 1G RMS random vibration |
| Casing Colour             | Black (RAL 9005)                                                                                                                                                                                                                                                                                    |            |                                                                                                                                                                                  |
| Weight                    | Net: 10.8kgs (24lbs)<br>Gross: 15.8kgs (34.8lbs)                                                                                                                                                                                                                                                    |            |                                                                                                                                                                                  |
| Dimensions<br>(W x D x H) | Product: 441.6 x 480 x 44 mm (17.4 x 18.9 x 1.73 in)<br>Packing: 590 x 808 x 140 mm (23.2 x 31.8 x 5.5 in)                                                                                                                                                                                          |            |                                                                                                                                                                                  |

Sales: +44 (0) 1273 570 220 Admin: +44 (0) 1273 608 331 Fax: +44 (0) 1273 570 215 Website: www.amplicon.com Email: sales@amplicon.com



Amplicon.com IT and Instrumentation for industry