


Impact-P AL13PSE




Features

The Impact-P AL13PSE is a compact, DIN Rail mountable, low power embedded system, utilising Intel® Apollo lake ATOM™ processor technology. Key features:-

- Low power consumption
- High end ATOM™ processing power
- ULTRA Compact fanless design
- OEM branding available
- Dual POE+ LAN

Dimensions



Sales: +44 (0) 1273 570 220 Admin: +44 (0) 1273 608 331 Fax: +44 (0) 1273 570 215 Website: www.amplicon.com Email: sales@amplicon.com


Impact-P AL13PSE

The information is believed to be accurate. However Amplicon Liveline Limited accepts no responsibility for any problems caused by errors and omissions. Specifications are subject to change without notice.

Specifications

Hardware Specification	Intel Atom® x5-E3930 Processor, Dual Core, 2M Cache, 1.3GHz (1.8GHz), 6.5W 2GB 204-pin SODIMM DDR3L (Max 8GB) LAN: 1 x Intel® 10/100/1000 network connection (supports PXE and WoL) 2 x 10/100/1000 POE+ LAN (IEEE 802.3at, up to 25.5W)	LED's and Switches	Power (PC on LED) Hard Disk Access LED
BIOS	Insyde SPI 64Mbit (supports UEFI boot only)	Display	1 x Mini DP++ resolution up to 4096x2160 @ 60Hz
Storage	1 x Full-size Mini PCIe (PCIe/USB 2.0) 1 x M.2 B key 2242. (PCIe/USB 2.0/SATA 3.0)	Mechanical	DC input +9 to 36VDC Design: Rugged compact embedded design Cooling: Fanless design Construction: Aluminium Color: Black/Silver Dimensions: 120(W) x 56(H) x 97(D)mm
System Expansion	1 x Full-size Mini PCIe (PCIe/USB 2.0) 1 x M.2 B key 2242. (PCIe/USB 2.0/SATA 3.0)	Environmental Operation	Acoustic noise: Near silent operation Operating Temperature: -20°C to 70°C (wide temp RAM & SSD) Humidity: 5 to 90% non-condensing
Supported O/S	Windows 10 IoT Enterprise (64-bit) Linux	Environmental Storage	Storage: -40 to 85°C Humidity: Storage: 5 to 90% non-condensing
External Interfaces	1 x DP++ 2 x USB 3.0 1 x RS232/422/485 1 x Intel® GbE RJ45 (I211AT) 2 x Isolated POE+ LAN (max 25.5W per port)	Certifications	CE, RoHS

Rear I/O plate

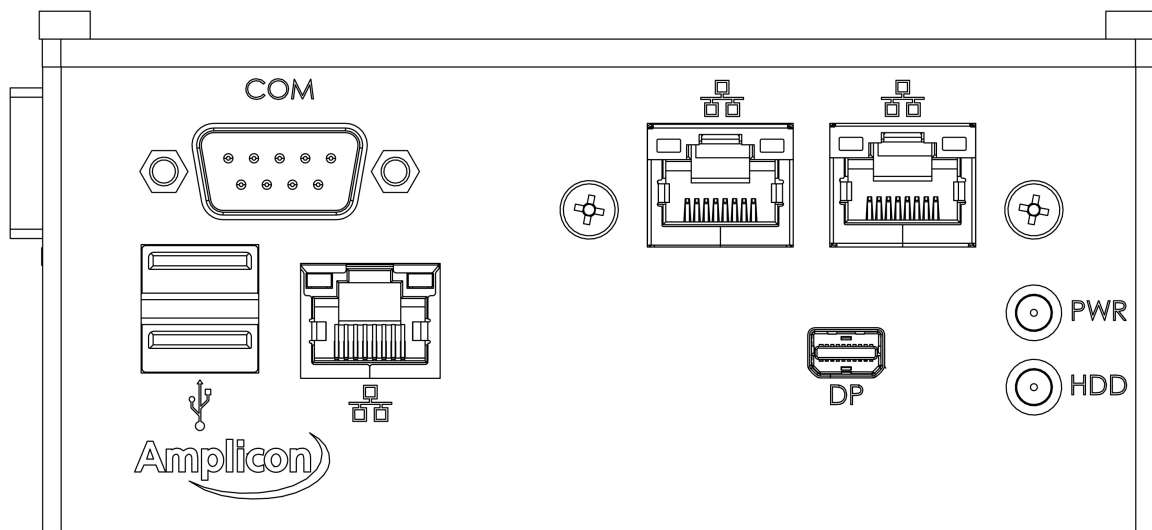

Sales: +44 (0) 1273 570 220 Admin: +44 (0) 1273 608 331 Fax: +44 (0) 1273 570 215 Website: www.amplicon.com Email: sales@amplicon.com