

# TCC-100/100I Series

Industrial RS-232 to RS-422/485 converters with optional 2 kV isolation



## Features and Benefits

- RS-232 to RS-422 conversion with RTS/CTS support
- RS-232 to 2-wire or 4-wire RS-485 conversion
- 2 kV isolation protection (TCC-100I)
- Wall mounting and DIN-rail mounting
- Plug-in terminal block for easy RS-422/485 wiring
- LED indicators for power, Tx, Rx
- Wide-temperature model available for -40 to 85°C environments

## Certifications



## Introduction

The TCC-100/100I Series of RS-232 to RS-422/485 converters increases networking capability by extending the RS-232 transmission distance. Both converters have a superior industrial-grade design that includes DIN-rail mounting, terminal block wiring, an external terminal block for power, and optical isolation (TCC-100I and TCC-100I-T only). The TCC-100/100I Series converters are ideal solutions for converting RS-232 signals to RS-422/485 in critical industrial environments.

## Specifications

### Serial Interface

|                                   |  |
|-----------------------------------|--|
| Baudrate                          | 50 bps to 921.6 kbps (supports non-standard baudrates) |
| Connector                         | Terminal block   |
| Isolation                         | TCC-100I/100I-T: 2 kV (-I model)                       |
| No. of Ports                      | 2  |
| Pull High/Low Resistor for RS-485 | 1 kilo-ohm, 150 kilo-ohms                              |
| RS-485 Data Direction Control     | ADDC® (automatic data direction control)               |
| Serial Standards                  | RS-232, RS-422, RS-485                                 |
| Terminator for RS-485             | N/A, 120 ohms, 120 kilo-ohms                           |

### Serial Signals

|           |  |
|-----------|--|
| RS-232    | TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND |
| RS-422    | Tx+, Tx-, Rx+, Rx-, GND                |
| RS-485-4w | Tx+, Tx-, Rx+, Rx-, GND                |
| RS-485-2w | Data+, Data-, GND                      |

## Power Parameters

|                             |   |
|-----------------------------|---|
| Input Current               | TCC-100/100-T: 85 mA @ 12 VDC<br>TCC-100I/100I-T: 150 mA @ 12 VDC |
| Input Voltage               | 12 to 48 VDC  |
| No. of Power Inputs         | 1   |
| Overload Current Protection | Supported   |
| Power Connector             | Terminal block (for DC models)                                    |
| Power Consumption           | TCC-100/100-T: 85 mA @ 12 VDC<br>TCC-100I/100I-T: 150 mA @ 12 VDC |

## Physical Characteristics

|              |  |
|--------------|--|
| Housing      | Metal  |
| Dimensions   | 67 x 100.4 x 22 mm (2.64 x 3.93 x 0.87 in)           |
| IP Rating    | IP30   |
| Weight       | 148 g (0.33 lb)                                      |
| Installation | DIN-rail mounting (with optional kit), Wall mounting |

## Environmental Limits

|  |   |
|--|---|
| Operating Temperature                  | Standard Models: -20 to 60°C (-4 to 140°F)<br>Wide Temp. Models: -40 to 85°C (-40 to 185°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)  |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)   |

## Standards and Certifications

|                       |  |
|-----------------------|--|
| EMC                   | EN 55032/24  |
| EMI                   | CISPR 32, FCC Part 15B Class A   |
| EMS                   | IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m<br>IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV<br>IEC 61000-4-5 Surge: Power: 1 kV<br>IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m<br>IEC 61000-4-8 PFMF |
| Environmental Testing | IEC 60068-2-1<br>IEC 60068-2-2<br>IEC 60068-2-3  |
| Safety                | EN 60950-1, IEC 60950-1  |
| Vibration             | IEC 60068-2-6  |

## MTBF

|           |                          |
|-----------|--------------------------|
| Time      | 3,017,857 hrs            |
| Standards | Telcordia (Bellcore), GB |

## Warranty


|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |

## Package Contents

|                  |   |
|------------------|---|
| Device           | 1 x TCC-100/100I Series converter                 |
| Installation Kit | 1 x DIN-rail kit<br>1 x rubber stand              |
| Cable            | 1 x terminal block to power jack converter        |
| Documentation    | 1 x quick installation guide<br>1 x warranty card |

## Dimensions

Unit: mm (inch)

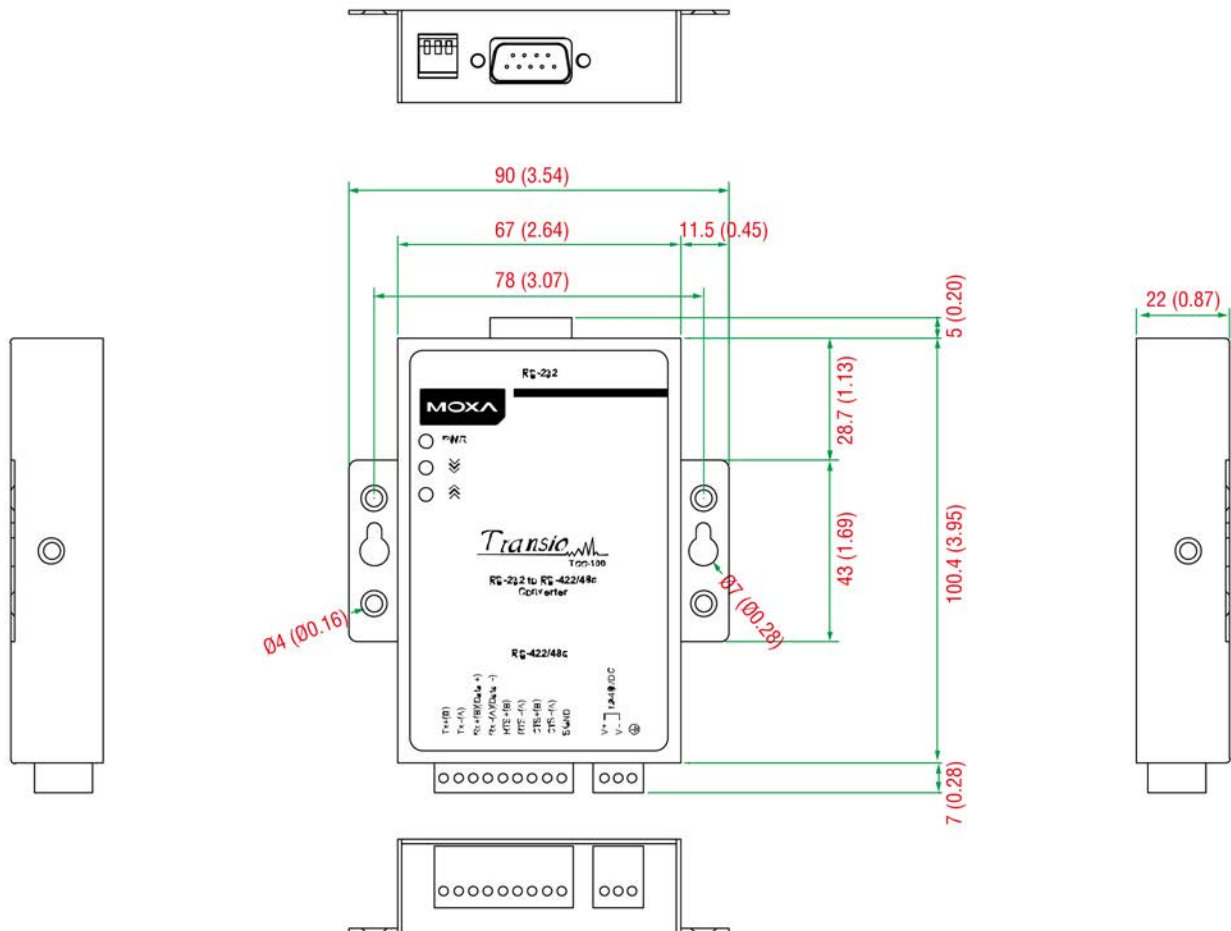

## Ordering Information

| Model Name | Isolation | Operating Temp. |
|------------|-----------|-----------------|
| TCC-100    | -         | -20 to 60°C     |
| TCC-100-T  | -         | -40 to 85°C     |
| TCC-100I   | ✓         | -20 to 60°C     |
| TCC-100I-T | ✓         | -40 to 85°C     |

## Accessories (sold separately)

### DIN-Rail Mounting Kits

|       |                              |
|-------|------------------------------|
| DK35A | DIN-rail mounting kit, 35 mm |
|-------|------------------------------|

## Power Cords

CBL-PJTB-10

Non-locking barrel plug to bare-wire cable