

# EKI-7712G-4FP

# EKI-7712G-4FPI

## 8GE+4G SFP Port Gigabit Managed Redundant Industrial PoE Switch



### Features

- 8 x Gigabit Ethernet ports + 4 x SFP ports
- Support 8 x IEEE 802.3at/af PoE ports for PD demands
- Redundancy: X-Ring Pro (ultra-high-speed recovery time, <20 ms), RSTP/STP (802.1w/1D)
- IXM function for fast deployment
- Security Pack with 802.1X, ACL, RADIUS, TACACS+, MAB Authentication, SNMPv3, HTTPS, SSH, and SFTP
- Management: SNMP v1/v2c/v3, WEB, Telnet, standard MIB, private MIB
- Supports NMS for easy and visualized to monitor and manage network remotely
- Dual 48 V<sub>DC</sub> power input and 1 x relay output

### Introduction

The EKI-7712G-4FP/4FPI support 8 Gigabit IEEE 802.3 at/af PoE ports and 4 SFP (mini-GBIC) ports. Provides up to 30 W per port for high-power-consumption powered devices. They are embedded with Advantech's IXM function, which can benefit users with fast deployment and can save considerably engineering time and costs. The EKI-7712G series also support NMS to help IT managers with networking maintenance and failure prevention. Finally, the series are equipped with X-Ring Pro, which can achieve ultra-high-speed recovery times of <20 ms to ensure network stability. The EKI-7712G-4FPI in particular also features a wide operating temperature of -40 ~ 75°C and NEMA TS2 rating, making it ideal for use in traffic applications. Finally, the EKI-7712G-4FP/4FPI have successfully passed the EN50121-4 European railway standard requirements for emissions and railway platform and trackside deployment.

### Specifications

#### Interfaces / Communications

- **I/O Port** 8 x 10/100/1000BASE-T/TX RJ-45  
4 x SFP (mini-GBIC) port  
Auto-Negotiation, Full/Half Duplex Mode  
Auto MDI/MDI-X Connection
- **Standards** IEEE 802.3 for 10BaseT  
IEEE 802.3u for 100BaseT(X)/FX  
IEEE 802.3ab 1000BaseT(X)  
IEEE 802.3z for 1000BaseSX/LX/LHX/ZX  
IEEE 802.3x for Flow Control
- **PoE** Port 1 ~ Port 8: IEEE 802.3at/af
- **Console Port** RS-232 (RJ45)
- **Power Connector** 6-pin screw Terminal Block (including relay)

#### Physical

- **Enclosure** Metal Shell
- **Protection Class** IP 30
- **Installation** DIN-Rail, Wall-mount
- **Dimensions (W x H x D)** 74 x 152 x 105 mm (2.91" x 5.98" x 4.13")

#### LED Indicators

- **System LED** PWR1, PWR2, SYS, Alarm and R.M.
- **Port LED** Link / Speed / Activity / PoE

#### Environment

- **Operating Temperature** -40 ~ 75°C (-40 ~ 167°F) (EKI-7712G-4FPI)  
-10 ~ 60°C (-40 ~ 140°F) (EKI-7712G-4FP)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Ambient Relative Humidity** 5 ~ 95% (non-condensing)
- **Overload Current Protection** Present
- **Reverse Polarity Protection** Present
- **MTBF** 1,001,782 hours

#### Power

- **Power Consumption** 12.1W @ 48V<sub>DC</sub> (System)
- **Power Input** 48 V<sub>DC</sub> (46 to 57 V<sub>DC</sub>)  
53 ~ 57 V<sub>DC</sub> is recommended for 802.3at  
redundant dual power input
- **Power Budget** 240W
- **Fault Output** 1 Relay Output

#### Certification


- **Safety** UL 61010-2-201
- **EMI** CE, CISPR 32, FCC Part 15B Class A
- **EMS** IEC 61000-4-2  
IEC 61000-4-3  
IEC 61000-4-4  
IEC 61000-4-5  
IEC 61000-4-6  
IEC 61000-4-8
- **EMC** EN 61000-6-2  
EN 61000-6-4  
IEC 60068-2-27
- **Shock** IEC 60068-2-32
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6
- **Traffic control** NEMA TS-2
- **Railway Trackside** EN 50121-4

#### Switch Properties

- **Switch Capacity** 24Gbps
- **Transmission Rate** 17.8Mpps
- **MAC Table Size** 8K
- **Jumbo Frame** 1,0240 Bytes
- **Packet Buffer Size** 4.1Mb
- **Max. IGMP Group** 256
- **Max. VLAN Group** 256 (VLAN ID 1 ~ 4094)

## Dimensions

Unit: mm [inch]

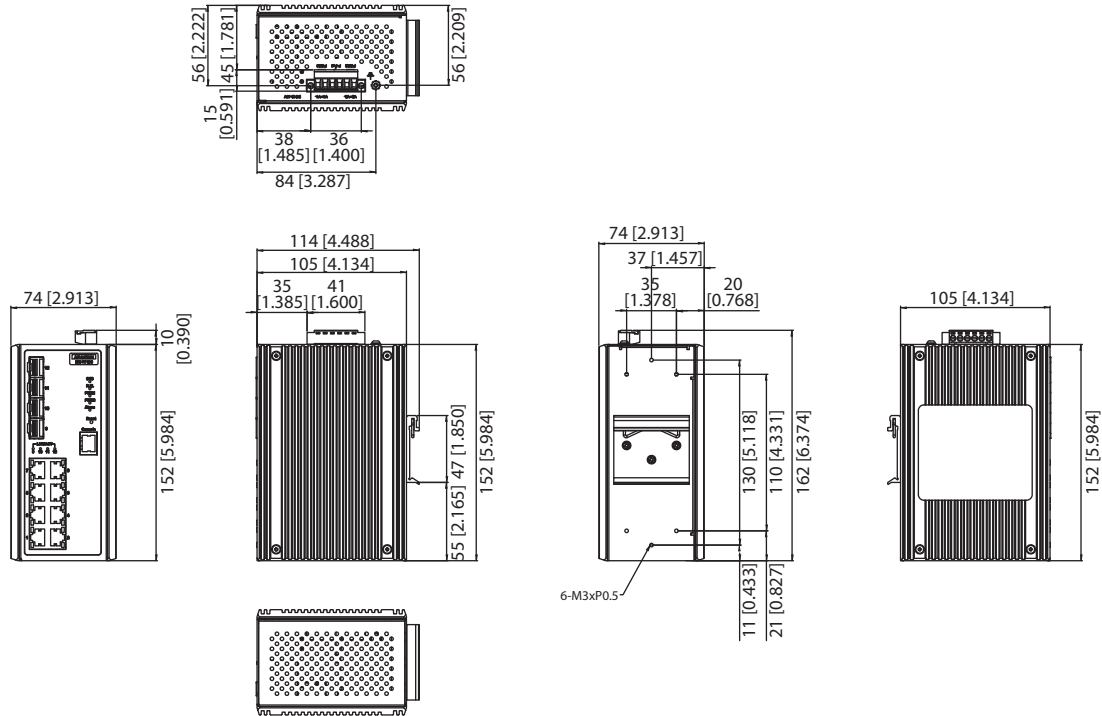

**Panel Cut-out Dimensions: 105 (4.137) x 152 (5.984) x 74 (2.91)**

### L2 Features

- **VLAN Arrange** 802.1Q Tag-based VLAN, 802.1ad QinQ VLAN Stacking
- **Port Mirroring** 1 to 1, N to 1  
Max. Mirror Session: 4
- **RSPAN** Remote Switched Port Analysis
- **GARP** GVRP, GMRP
- **IP Multicast** IGMP Snooping v1/v2/v3, MLD Snooping, IGMP Immediate leave
- **Storm Control** Broadcast, Multicast, Unknown unicast
- **LLDP** 802.1ab LLDP, LLDP-MED
- **Industrial Protocol** Modbus/TCP
- **Redundancy** IEEE 802.1D-STP, IEEE 802.1s-MSTP, IEEE 802.1w-RSTP, X-Ring Pro, with ultra high-speed recovery time less than 20ms, ERPS(G.8032)

### QoS

- **Priority Queue Scheduling** WRR (Weighted Round Robin), SP (Strict Scheduling Priority) Hybrid Priority, Max. Priority Queues: 8
- **Class of Service** IEEE 802.1p Based CoS, IP TOS, DSCP based CoS
- **Rate Limiting** Ingress Rate limit, Egress Rate limit
- **Link Aggregation** IEEE 802.3ad Dynamic Port Trunking, Static Port Trunking

### Security

- **Port Security** Static/Dynamic MAC, Max. Learning Limit, MAC Violation Notice
- **802.1X** Port-based/MAC-based Authentication (MD5/PEAP/TLS/TTLS Encryption)
- **MAB** MAC Authentication Bypass
- **Authentication** RADIUS, TACAS+
- **IP Security** IP Source Guard, DHCP Snooping, ARP Spoofing Prevention
- **ACL** Access Control List (IP-ACL, MAC-ACL)  
Max. ACL Entries: 128

### Management

- **PoE** PoE system settings, port settings and status
- **DHCP** Client, Server, Option66/67/82, DHCP Relay
- **Access** SNMP v1/v2c/v3, WEB, Telnet, RMON, Standard MIB-II, Private MIB, Ethernet-Like MIB, RMON MIB (Group 1, 2, 3, 9)
- **Security Access** SSH2.0, SSL
- **Software Upgrade** TFTP, SFTP, HTTP, Dual Image
- **NTP** SNTP client

## Ordering Information

- **EKI-7712G-4FPI-AE** 8GE + 4SFP Port Managed Ethernet PoE Switch w/ Wide Temp
- **EKI-7712G-4FP-AE** 8GE + 4SFP Port Managed PoE Ethernet Switch

Note: For SFP copper type, only 1000Mbps supported.